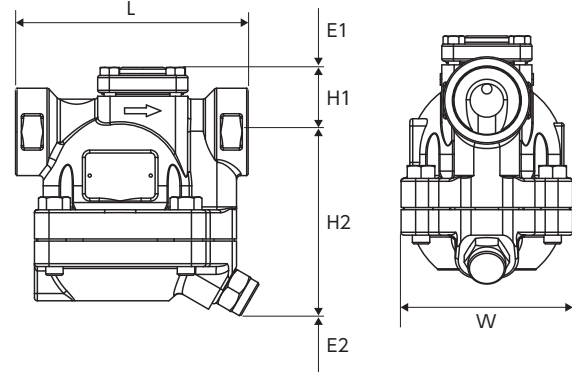
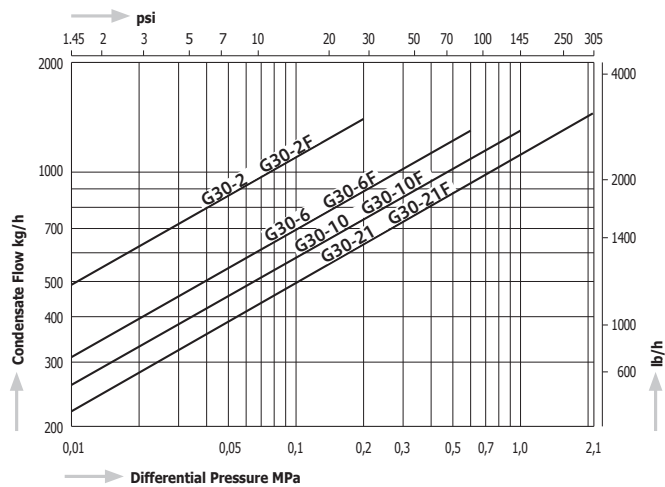
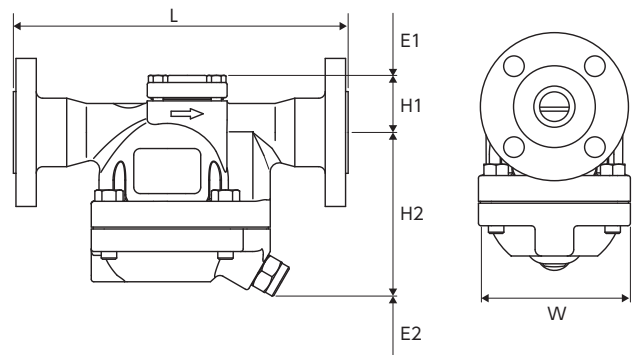


G30

**Screwed****Flanged Connection****Dimensions****G30 Screwed****Capacity Chart****G30-F Flanged**

Connections	Size	Dimensions (mm)				Dimensions (in)				Weight	
		L	H1	H2	W	L	H1	H2	W	kg	lb
Rc	¾"	155	44	125	118	6.1	1.7	4.9	4.6	6,7	14.8
	1"					6,5				14.3	
	1¼"	160				6.3				6,3	13.9
	1½"										
NPT	¾"	155	44	125	118	6.1	1.7	4.9	4.6	6,7	14.8
	1"	160				6.3				6,6	14.6
	1¼"	165				6.5				6,5	14.3
	1½"					6,3				13.9	
Flanged ASME/JPI	1¼"	260	44	125	118	10.2	1.7	4.9	4.6	9,1	20.0
	1½"									10,0	22.0
Flanged JIS	1¼"	260	44	125	118	10.2	1.7	4.9	4.6	~10,5	~23.1
	1½"	*JIS20K:264				*JIS20K:10.4				~10,8	~23.8
Flanged PN25	DN32	230	44	125	118	9.0	1.7	4.9	4.6	10,1	22.3
	DN40									10,9	24.0

Model	Max. Allowable Pressure (PMA)		Max. Allowable Temperature (TMA)		Max. Operating Pressure (PMO)		Max. Operating Temperature (TMO)		Body Material
	MPa	psig	°C	°F	MPa	psig	°C	°F	
G30-2	2,5	363	250	482	0,2	29	235	455	Ductile Cast Iron FCD450
G30-6					0,6	87			
G30-10					1	145			
G30-21					2,1	305			
G30-2F					0,2	29			
G30-6F					0,6	87			
G30-10F					1	145			
G30-21F					2,1	305			