



G20N

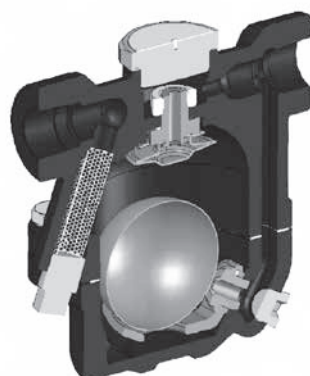


Screwed



Flanged Connection

GC20

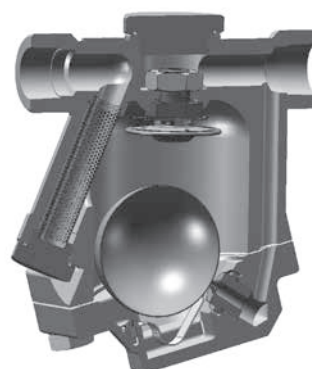


Screwed




Flanged Connection


Capacity Chart G20N / GC20

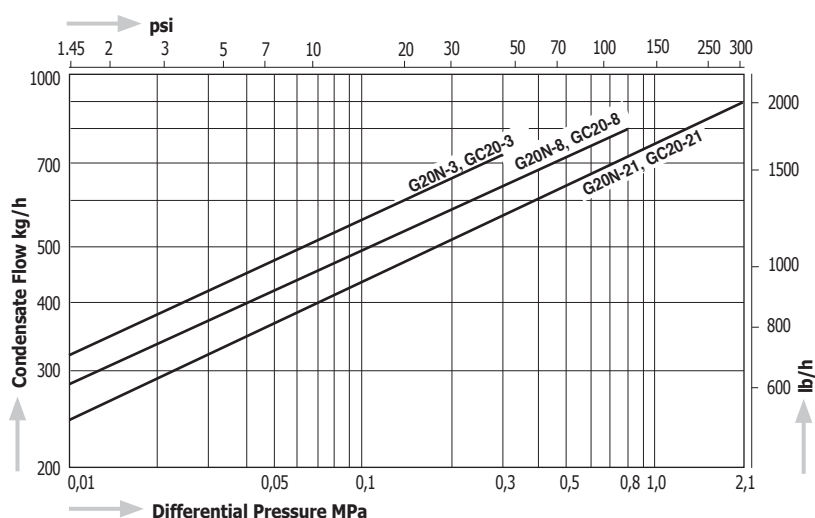

Dimensions G20N

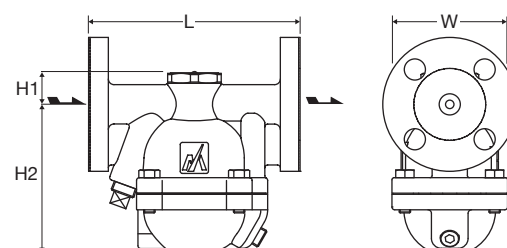

Dimensions GC20

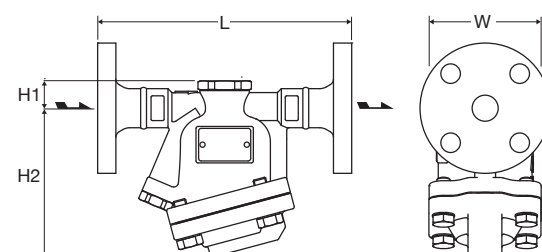

Available versions G20N / GC20

Max. Operating Pressure:

G20N (GC20)- 3	0,3 MPa (43 psig)
G20N (GC20)- 8	0,8 MPa (116 psig)
G20N (GC20)- 21	2,1 MPa (305 psig)

Model	Connections	Size	Max. Operating Pressure, PMO		Max. Operating Temperature, TMO		Dimensions (mm)				Dimensions (in)				Body Material	Weight	
			MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W		kg	lb
G20N	Screwed Rc, NPT	1/2"	2,1	305	220	428	120	24	105	82	4.7	1.0	4.1	3.2	Ductile Cast Iron FCD450	2,5	5.5
		3/4"							107				4.2			2,6	5.7
		1"														3,8*	8.4*
G20NF	Flanged JIS, ASME	1/2"					150*	24	105	82	5.9	1.0	4.1	3.2		4,2*	9.2*
		3/4"					160*				6.3					5,3*	11.7*
		1"														3,7	8.1
	Flanged DIN	DN15					150	24	105	82	5.9	1.0	4.1	3.2		4,2	9.2
		DN20					160				6.3					4,8	10.6
		DN25															
GC20	Screwed Rc, NPT	1/2"	2,1	305	220	428	120	21	113	86	4.7	0.8	4.4	3.4	Stainless Steel SCS13A/CF8	2,4	5.3
		3/4"														2,5	5.5
		1"														3,9*	8.6*
GC20F	Flanged JIS, ASME	1/2"					175	21	113	86	6.9	0.8	4.4	3.4		5,0*	11.0*
		3/4"					195				7.7					5,8*	12.8*
		1"					215				8.5					3,4	7.5
	Flanged DIN	DN15					150	21	113	86	5.9	0.8	4.4	3.4		3,9	8.6
		DN20					160				6.3					4,6	10.1
		DN25															

*Depending on the flange rating, the weight and length may differ.